

Splash₂o Aqua-Tower Top Hub Hinge Locking Pin Replacement Instructions

PREPARATION:

- Remove Aqua-Stations on Top Hub

1. *Disconnect hose in Top Hub*

- A. Lower Top Hub and Upper arms into storage position
- B. Loosen hose connection inside Top Hub
- C. Cut, remove, and discard zip tie that holds the arm hose in position

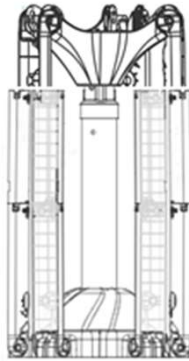


Figure 1A

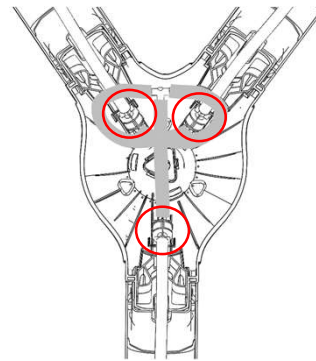


Figure 1B

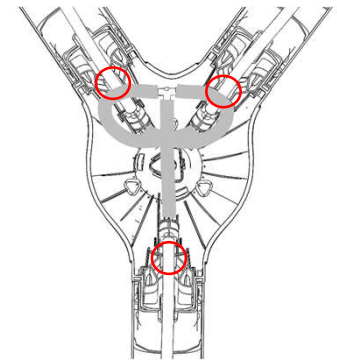


Figure 1C

2. *Remove and Replace Hinge Locking Pin*

- A. Move the hose out of the way and remove Hinge Locking Pin by pinching it together and pulling it out. Note orientation of the Hinge Locking Pin as it is removed.
- B. Insert new Hinge Locking Pin in the same orientation by pinching it together and slightly tilting it as it is inserted. Ensure that the pins are fully seated in the side holes of the Top Hub.

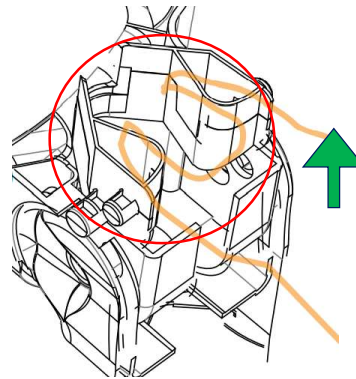


Figure 2A

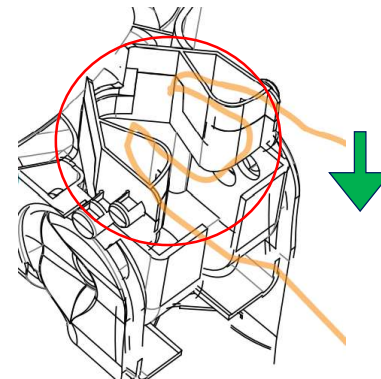


Figure 2B

3. *Reconnect hose in Top Hub*

- A. Tighten hose connectors together
- B. Extend arm out and lock into open position
- C. Zip tie arm hose to the Top Hub hose under it.

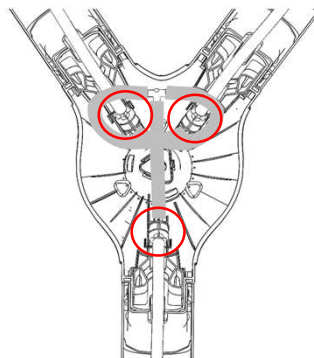


Figure 3A

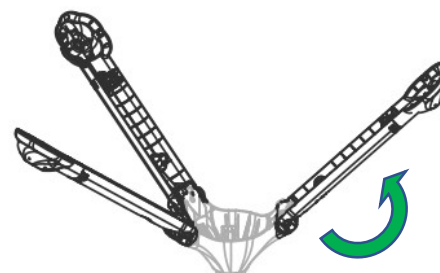


Figure 3B

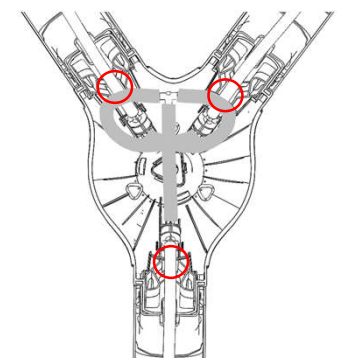


Figure 3C